
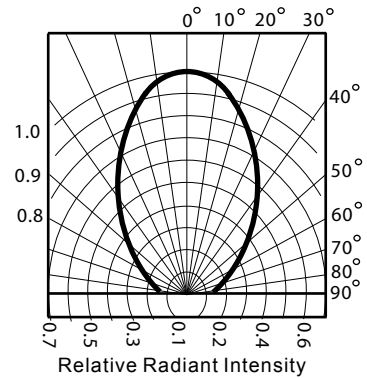
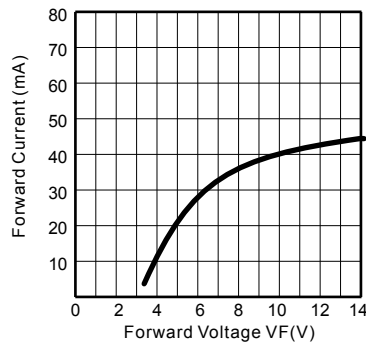
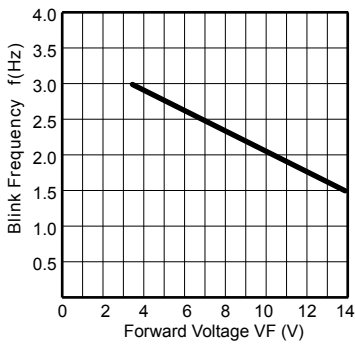
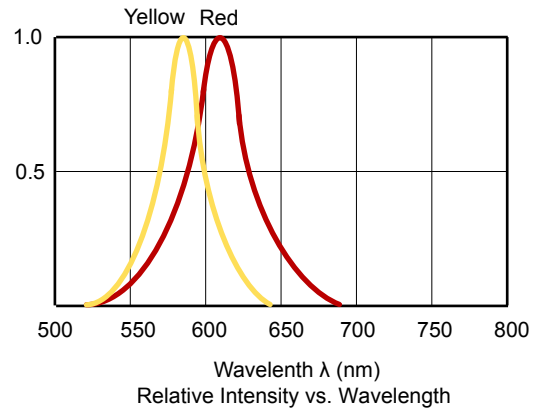


B05RYC

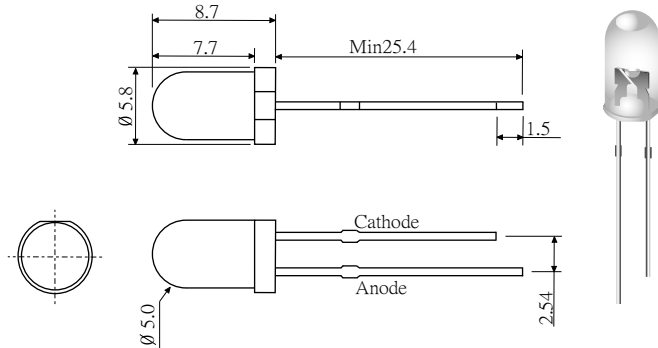

Absolute Maximum Ratings:

Parameter	Maximum Rating	Unit
Operating Voltage	15	V
Operating Temperature Range	- 20°C to +75°C	
Storage Temperature Range	- 40°C to +100°C	
Lead Soldering Temperature	260°C for 5 seconds	

- * 5mm with Red and Yellow and Blinkong I.C
- * Encapsulated with Water Clear Package.
- * Standard T 1 3/4
- * Pulse rate 2.2 Hz
- * 1/4 Duty cycle
- * Easity be driven by TTL & C-MOS circuit No External circuitry needed.

Electro-Optical Characteristics (Ta=25°C)

Parameter Radiant	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Luminous Intensity	If=20mA	lv Red	100	150	200	mcd
		lv Yellow	150	250	350	
Spectral Bandwidth	If=5mA	Δλ		35		nm
Wavelength	If=20mA	λp Red		660		
		λp Yellow		590		
Half View Angle	If=20mA	2θ 1/2		30°		deg

NOTES: 1. All dimensions are in millimeter (inches), tolerance is 0.25 unless otherwise noted.
2. Specifications are subject to change without notice.